


Air Hose

1/4" to 1"

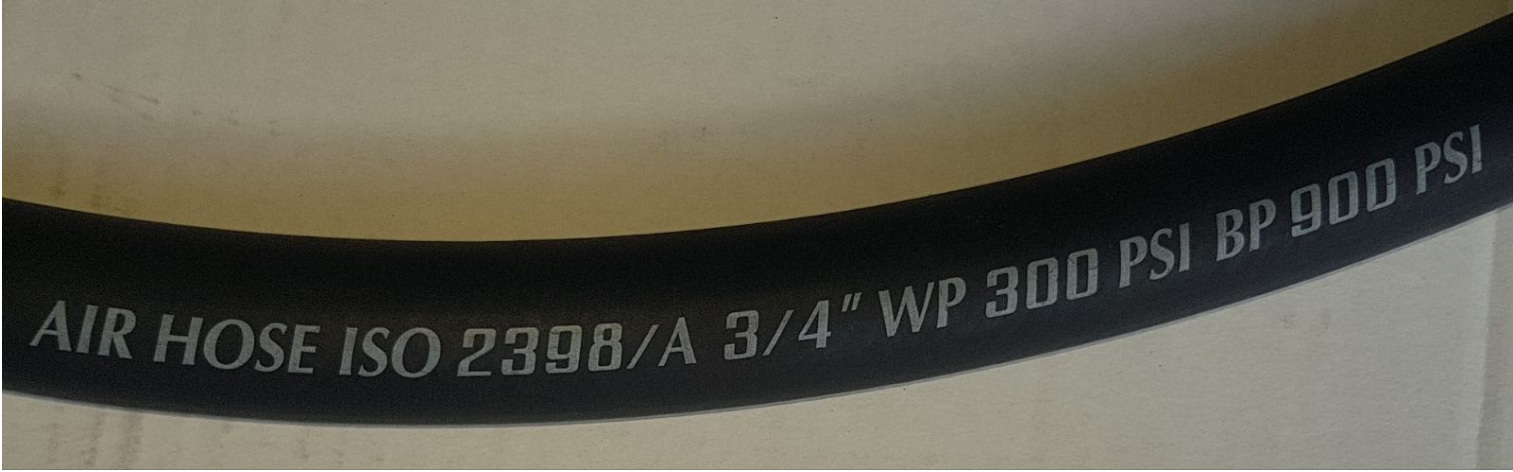


TECHNICAL SPECIFICATIONS:

- APPLICATION
- : For use with air compressors in mines, quarries, service stations, construction sites, shipyards, factories, and other general services.
- TUBE
- : Synthetic rubber
- REINFORCEMENT
- : High tensile synthetic textile filament yarn
- COVER
- : Ozone and weather resistant synthetic rubber
- OPERATING TEMPERATURE
- : -25°C to +70°C
- PACKAGING
- : Coiled and wrapped with transparent PVC film

Part No.	Size	Length	Internal Diameter	External Diameter	Working Pressure		Burst Pressure		Weight
	inch	m	mm	mm	bar	psi	bar	psi	kg/m (±5%)
0702-102/R	1/4	100	6.3	13.5	20	300	60	900	0.175
0702-103/R	3/8	100	9.5	17.5	20	300	60	900	0.266
0702-104/R	1/2	100	12.7	21.0	20	300	60	900	0.329
0702-105/R	3/4	100	19.0	30.0	20	300	60	900	0.630
0702-106/R	1	50	25.4	38.0	20	300	50	725	0.920

1-1/4" to 2"

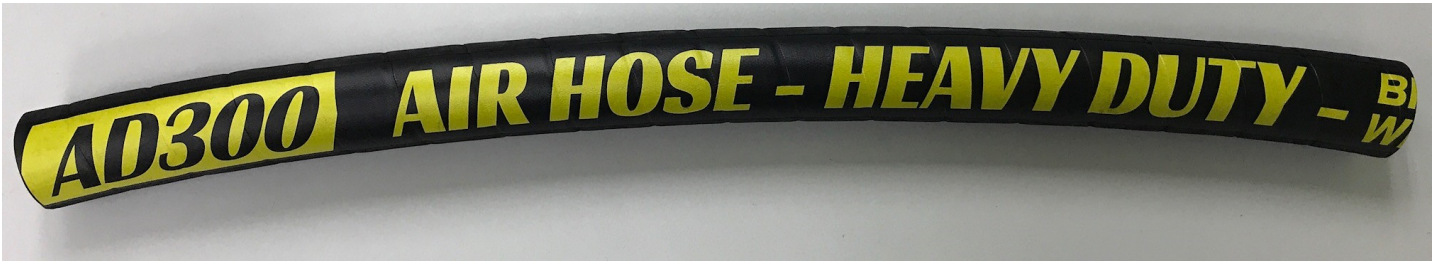

TECHNICAL SPECIFICATIONS:

- APPLICATION
- : For use with air compressors in mines, quarries, service stations, construction sites, shipyards, factories, and other general services.
- TUBE
- : Oil mist resistant synthetic rubber
- REINFORCEMENT
- : High tensile synthetic fabric
- COVER
- : Ozone and weather resistant synthetic rubber
- OPERATING TEMPERATURE
- : -25°C to +70°C
- PACKAGING
- : Coiled and wrapped with transparent PVC film

Part No.	Size	Length	Internal Diameter	External Diameter	Working Pressure		Burst Pressure		Weight
	inch	m	mm	mm	bar	psi	bar	psi	kg/m (±5%)
0702-107/R	1-1/4	40	32.0	44.0	20	300	60	900	0.870
0702-108/R	1-1/2	40	38.0	51.0	20	300	60	900	1.100
0702-109/R	2	40	50.8	65.0	20	300	60	900	1.560