

Suction Hose

(W-Type)



Suction Hose (W-Type: General Purposes)

Features:



Light in weight
and easy to
handle



Highly in
flexibility -
usable anywhere




Easy installation

W-Type Hose is a general purpose suction hose which is excellent for fluid conveyance.

Temperature Range: 0 - 65°C

Structure:

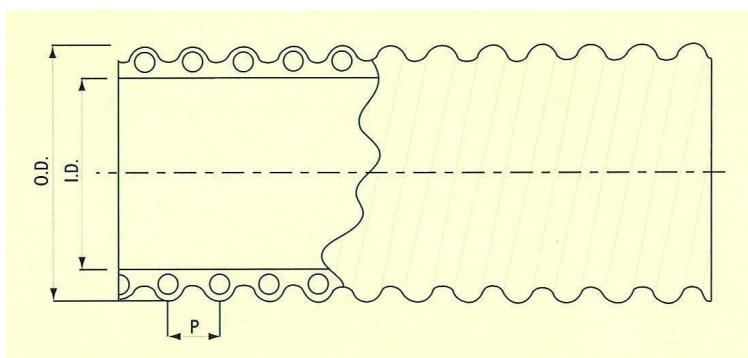

Part No.	Size			Standard Length (m)	WP (kgf/cm ²)	BP (kgf/cm ²)	Minimum Bending Radius (mm)	Reference Weight (g/m)
	in (ID)	mm (ID)	mm (OD)					
PWG-25B	1	25.0	33.5	20	3.0	13	50	340
PWG-25B/30	1	25.0	33.5	30	3.0	13	50	340
PWG-38B	1.5	38.1	48.8	20	2.5	11	55	460
PWG-50B	2	50.8	62.5	20	2.5	10	95	720
PWG-50B/30	2	50.8	62.5	30	2.5	10	95	720
PWG-65B	2.5	63.5	78.1	20	2.5	10	120	1000
PWG-75B	3	76.2	94.5	20	2.5	10	150	1300
PWG-90B	3.5	89.0	108.4	20	2.0	8	210	2000
PWG-100B	4	101.6	122.1	20	2.0	8	240	2400
PWG-125B	5	127.0	149.3	20	2.0	8	400	3750
PWG-150B	6	152.4	175.6	20	1.5	6	450	4200
PWG-200B	8	203.0	230.8	20	1.2	5	1000	6000
PWG-250B	10	254.0	283.4	20	1.0	4	1500	7750

SPEEDO MARINE (PTE) LTD | ADDRESS: 11 TUAS LINK 2, SINGAPORE 638559

TEL: +65 6863 1998 | FAX: +65 6863 1667 | EMAIL: enquiry@speedo.com.sg | WEBSITE: www.speedo.com.sg

Ver. 110718. All written and visual data contained in this document are based on the latest product information available at the time of publication. Speedo Marine (Pte) Ltd reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.